

# XGR26ACJ



**SOLID**  
TO SUCCEED


## Mast Lift-Electric

Item	Metric	Imperial
<b>Dimension</b>		
Overall dimension - stowed state	Length	3010mm
	Width	990mm
	Height	2000mm
Overall dimension - transportation	Length	3010mm
	Width	990mm
	Height	2000mm
Platform dimension	Length	850mm
	Width	900mm
	Height	1150mm
Wheelbase	1200mm	3ft1in
Fly jib length	1600mm	5ft 3in
Min. ground clearance	90mm	4in



<b>Performance</b>		
Max. working height	10100mm	33ft2in
Max. platform height	8100mm	26ft7in
Max. working range	3500mm	11ft6in
Max. up and over clearance	6600mm	21ft8in
Max. lift capacity	200kg	441 lbs
Max. number of occupants	2	
Max. working slope	X-2.5° / Y-2.5°	
Fly jib luffing range	-60°~66°	
Turntable rotation	345°	
Platform rotation	/	
Total weight	3050kg	6724lb
Driving speed (stowed)	5km/h	3.1mph
Driving speed (raised or extended)	0.6km/h	0.37mph
Min. turning radius (inside/outside)	1300mm/2100mm(front)	≤ 4ft3in/ ≤ 6ft11in(front)
	700mm/1700mm (back)	≤ 2ft4in/ ≤ 5ft6in(back)
Turntable tailswing (stowed)	120mm	5in
Max. gradeability	25% (14°)	

<b>Power source</b>		
Control	24 V DC proportional control	
Traveling motor	2 kW/16 V	
Emergency power supply	/	
Main power source - battery	24V/265Ah	
Main power source - charger	24V/36A	
Hydraulic tank capacity	6L	1.58gal

<b>Tire</b>		
Tire size	406mm×125mm	1ft4in×0ft5in
Tire ground pressure	10.83kg/cm²	154.9psi
Driving wheels	2	
Braking wheels	2	
Steering wheels	2	

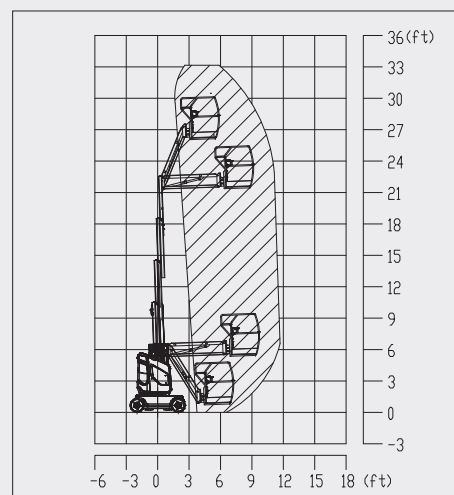

Stowed / Trans

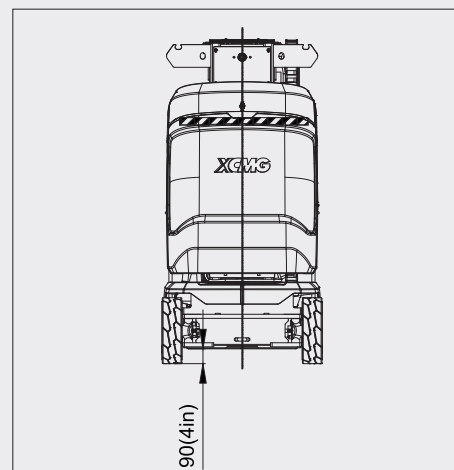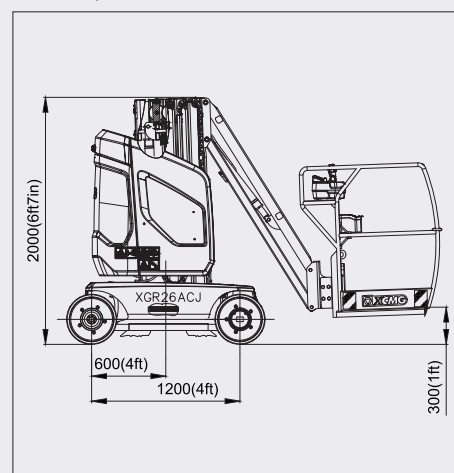

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.



**SOLID**  
TO SUCCEED

# MAST LIFT XGR26ACJ

## Standard configuration

- 2-wheel drive
- Lowering and moving alarm
- Tilt alarm
- Horn with adjustable volume
- Emergency stop of platform and chassis
- 2-wheel braking system
- Proportional self-leveling system
- Proportional joystick control
- Drive enable
- Full time positive traction drive
- Telematics pre-interface
- Anti-extrusion protection device
- Harsh environment kits
- Thumb rocker steering



Working height  
10.1 meters



Lift capacity  
200Kg



Electric  
power



## Optional configuration

- Working light assembly
- Platform air pipe

**XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO.,LTD**

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China  
mewp@xcmg.com